



## CTH 46 - CTD 43 / 46 CTH 46 Part number 89422508



### CTH 46

- Heating / cooling function
- Measurement and setpoint display

### CTD 43

- Heating or cooling function
- Measurement display
- Measurement deviation display-Setpoint via LED

### CTD 46

- Heating or cooling function
- Measurement and setpoint display
- 1 configurable alarm

Type	Output	Supply voltage
89422508	CTH 46	Relay
89422518	CTH 46	Logic
89422502	CTH 46	Relay
89422512	CTH 46	Logic
89421108	CTD 43	Relay
89421118	CTD 43	Logic
89421102	CTD 43	Relay
89421112	CTD 43	Logic
89422108	CTD 46	Relay
89422118	CTD 46	Logic
89422102	CTD 46	Relay
89422112	CTD 46	Logic

### Supply

Frequency (Hz)	50 / 60
Tolerance	-15% +10% Un
Consumption	5 VA
Display CTD 43	Measurement or setpoint: red LEDs, 3-digit, 7-segment, height 10 mm
Display CTH 47 / CTD 46	Measurement: red LEDs, 3-digit, 7-segment, height 10 mm Setpoint: green LEDs, 3-digit, 7-segment, height 7,5 mm

### Switch

#### Insulation resistance conforming to IEC 348

Insulation voltage according to IEC 348	1500 V
Immunity to interference conforming to IEC 801-4	Level 3
Immunity to interference conforming to IEC 801-2	8000 V
Accuracy	± 0.3% of the full measurement scale at an ambient temperature of 25 °C at Un
Operating temperature range (°C)	0 → +50 °C
Storage temperature range (°C)	-30 → +70 °C
Relative humidity (Rh no condensation)	20 → 85%

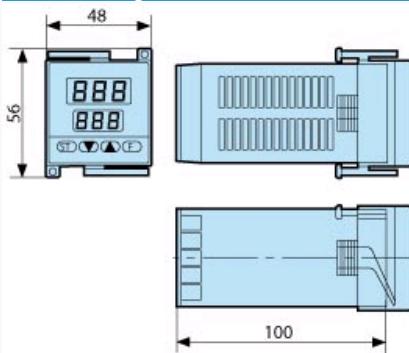
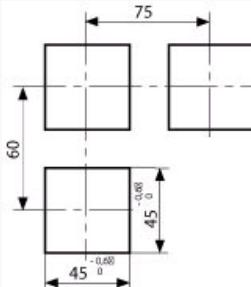
### Housing material

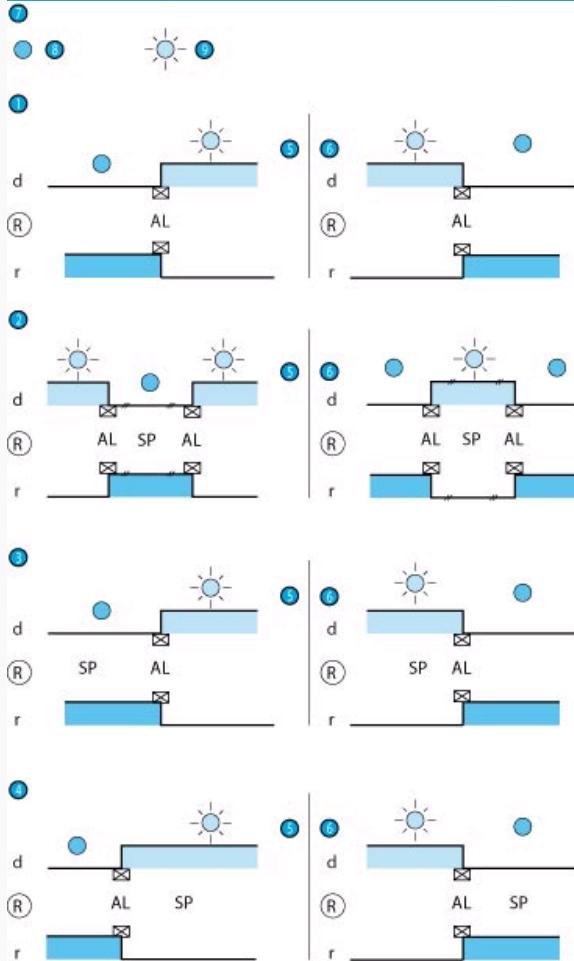
Front panel	polycarbonate membrane
Protection class according to IEC 529 (IEC 70-1)	IP 54
Connection	screw terminals
Weight (g)	160
Approvals	UL/CSA

### Inputs

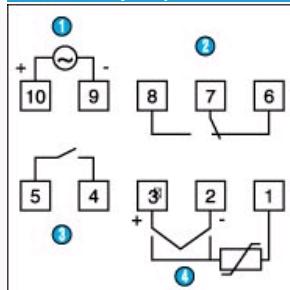
Thermocouples J, K, and N	IEC 584-1
Thermocouples L	DIN 43710
Reference junction	Automatic cold junction compensation: 0 to 50 °C (Thermocouples)
Reference junction drift	0,1 °C / °C
Line resistance	100 Ω max
Calibration (IEC 584-1)	IEC 584 - 1
Resist. temp. detector Pt 100 according to IEC 751	3-wire
Line resistance	< 4 Ω
Input type and standard range TC	L (0/800°C) (0/999°F) J (0/800°C) (0/999°F) K (0/999°C) (0/999°F) N (0/999°C) (0/999°F)
Input types and standard range RTD Pt100	(-199/500°C) (-19,9/99,9°F) (-199/999°C)
Output	
Type of output	discontinuous
Action type CTH 46	heating-cooling

Action type CTD 43 - CTD 46	heating or cooling
Limitation of output power: SOFT-START- heat action	adjustable from 0 to 100%
Limitation of output power: SOFT-START-heat/cool action	adjustable from -100 to + 100%
Main output changeover relay	3 A 250 V AC resistive
Main output--logic	Max. load: 700 Ω Level 0: < 0,5 V DC Level 1: 14 V DC± 20% @ 20 mA max 24 V DC± 20% @ 1 mA max
Main output cycle time	1 s → 200 s
Cool output CTH 46 only	N/O-1 A contact, 250 V AC resistive
Alarm output CTD 43-CTD 46 only	N/O-1 A contact, 250 V AC resistive
Control characteristics	
Control algorithm	PID with auto-tune and adaptive tune: SMART
Control type CTD 43 CTD 46	heating or cooling
Control type CTH 46	heating-cooling
Sampling time	500 ms
Proportional band Pb CTD 43 - CTD 46	1,0% to 99,9% of scale amplitude
Proportional band Pb CTH 46	1,5% to 99,9% of scale amplitude
Proportional band Pb	■
Note: if Pb = 0% discrete action	
Hysteresis (during discrete action)	0,1% to 10% of scale amplitude
Integral time ti	
Note: if ti > 20 min	1 min 20 s to 20 min 0 s (10 s resolution)
Derivative time td.	1 s to 9 min 59 s
Note: if td=0	
Cycle time heating	1 s → 200 s
Cycle time cooling (CTH46 only)	1 s → 200 s
Heat-cool control CTH 46	rC x heat proportional band
Cool proportional band	
Heat-cool control	0,20 → 1,00
rC: relative gain	
Heat-cool control CTH 46	-20% to + 50% of the heat proportional band
dead.overlap band	
Alarms (on CTD 43 and CTD 46 only)	
Type of output	direct or reverse
Functions	absolute alarm . band alarm . deviation alarm
Reset to zero	manual
Inhibition	can be configured
Alarm threshold - absolute alarm	absolute value independent from SP
Alarm threshold - band alarm	value relative to SP, adjustable from 0 to 500 °C/F
Alarm threshold - deviation alarm	value relative to SP, adjustable from -199°C/F (negative deviation) to +500°C/F (positive deviation)
Alarm	0.1 to 10% of scale amplitude

**Dimension Diagram : Panel cut-out****Dimension Diagram : CTH / CTD**

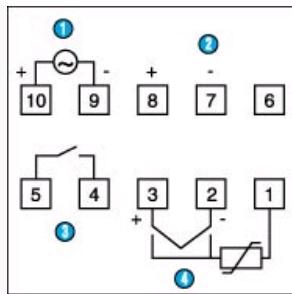
**Curves : Operating modesSummary of the various configurations****Nº Legend**

<b>Nº</b>	<b>Legend</b>
1	Absolute alarm
2	Band alarm
3	Positive deviation alarm
4	Negative deviation alarm
5	High
6	Low

**: CTH 46 relay output****Nº Legend**

<b>Nº</b>	<b>Legend</b>
1	Supply
2	Main output 250 V AC / 3A resistive
3	Cool output 250 AC / 1 A resistive
4	14-15: Input 50 mA AC (Current transformer connected for load break monitoring or selection of 2 <sup>nd</sup> setpoint)

**: CTH 46 logic output**

**Nº | Legend**

- | Nº | Legend   |
|----|--|
| 1  | Supply   |
| 2  | Main output 0-24 V DC / 20 mA max  |
| 3  | Cool output 250 V AC / 1 A resistive   |
| 4  | 14-15: Input 50 mA AC (Current transformer connected for load break monitoring or selection of 2 <sup>nd</sup> setpoint) |